ISUZU
DRIVEN BY RELIABILITY

All images displayed in this document are for illustrative purposes only.

Specification Guide

NKR TIPPER 60.15

Weight Rating

GVM	5,995 kg
GCM	8,000 kg - 9,500 kg

Engine

Power	110 kW @ 2,800 rpm
Torque	375 Nm @ 1,280 - 2,800 rpm

Transmission

6 speed manual transmission (MT)

9 speed dual clutch transmission (DT)

Wheelbase

2,490 mm

Body

Factory fitted single lift tipper

Key Features

- ADR 80/04 (pPNLT) Compliant
- Advanced Emergency Braking (AEB)
- Bi-LED Headlamps with Daytime Running Lamps
- ECE-R29 cab with side anti-intrusion beams
- Electronic Stability Control (ESC)
- Lane Departure Warning (LDW)
- Full Speed Adaptive Cruise Control (FACC)**
- Factory fitted tipper
- LHS and RHS rope rails
- Cubic volume: 2.0m^3
- Auto release body lockdown hook

** Dual Clutch transmission only

Truck Finder

Scan to search, view and download full spec sheets for all Isuzu truck models.

ISUZU TRUCKS

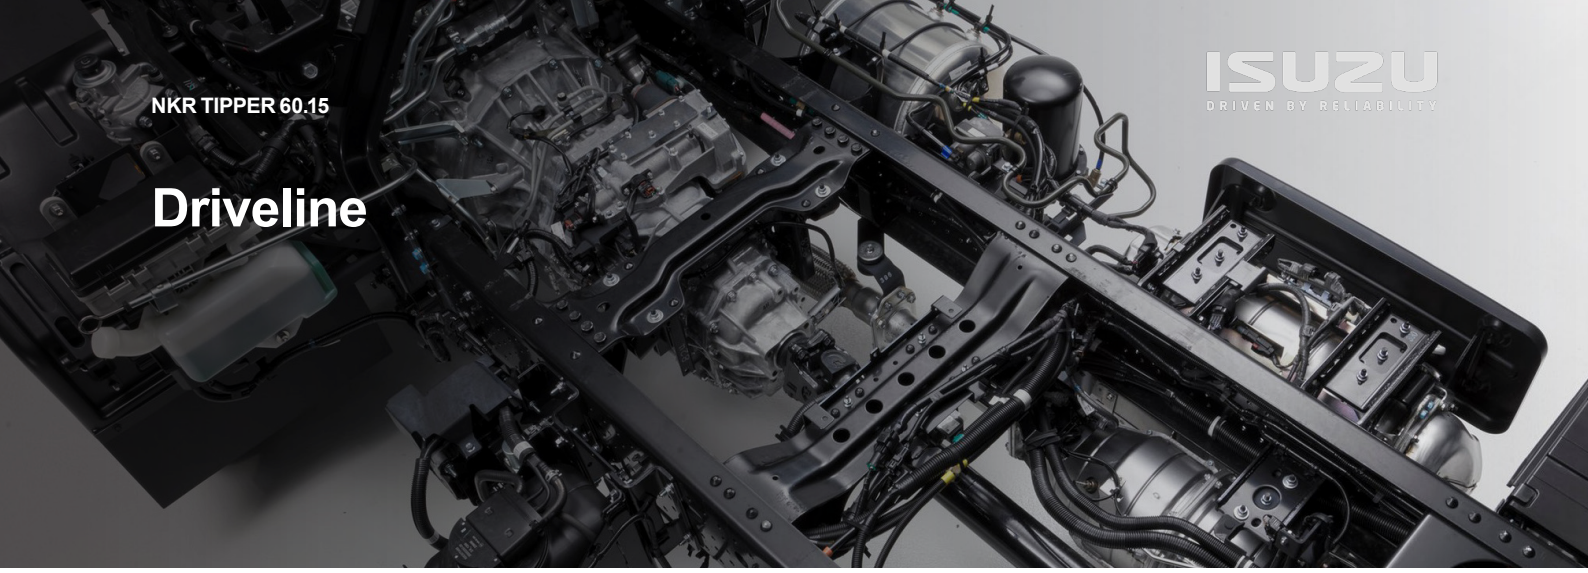

Driveline

Engine

Description	Isuzu 4JZ1-TCS
Type	4 cylinder
Power	110 kW (150PS) @ 2,800 rpm
Torque	375 Nm @ 1,280 - 2,800 rpm
Displacement	2,999 cc
Bore x Stroke	95.4 mm x 104.9 mm
Induction	Electronically controlled variable nozzle turbocharger with air-to air intercooler.
Fuel Injection	Direct injection high pressure common rail system
Emission Standard	ADR 80/04 (pPNLT) compliant
Emission Control	SCR (Selective Catalytic Reduction) DPD (Diesel Particulate Diffuser) EGR (Exhaust Gas Recirculation)
Auxiliary Brake	Vacuum controlled exhaust brake

4JZ1-TCS 150PS pPNLT

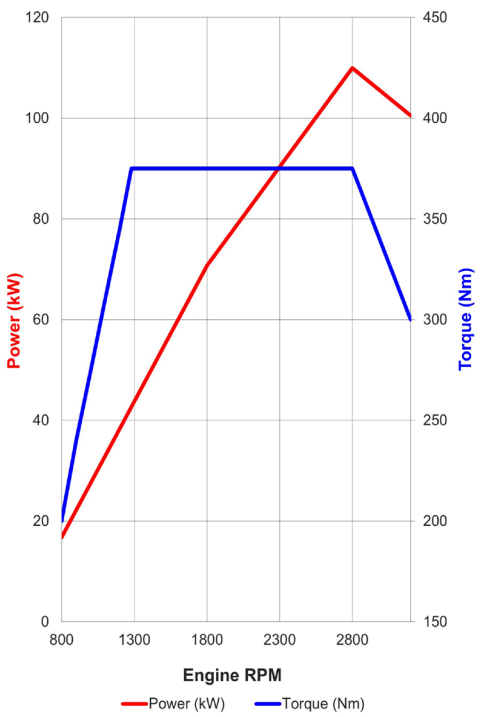

Transmission

MT

Description: ISUZU MYY-6Z

Type: 6 speed manual with synchromesh on gears 2 - 6

Ratios:

1	2	3	4	5	6	REV
5.97	3.43	2.04	1.37	1.00	0.70	5.70

Power Take Off Facility: Provision on LHS of transmission case. Drive from counter gear.

DT

Description: ISUZU MYR-9S

Type: 9 speed dual clutch transmission with both fully automatic and clutchless manual operation modes

Ratios:

1	2	3	4	5	6	7	8	9	REV
5.16	3.94	2.86	2.18	1.67	1.30	1.00	0.76	0.58	6.61

Power Take Off Facility: Provision on LHS of transmission case. Driven from counter gear.

Clutch

MT

Type: Single plate with auto adjusting hydraulic control and vacuum assistance

Clutch Plate Diameter: 300 mm

Clutch Lining Area: 847 cm^2

DT

Type: Fully automated dual wet clutch and torque converter (TC) with lock up

Technology & Equipment

Intelligent Safety

ACTIVE SAFETY	Advanced Emergency Braking (AEB)
	Anti Lock Braking System (ABS)
	Anti Skid Regulator (ASR)
	Attention Alert System (AAS)
	Auto Lighting System (ALS)
	Distance Warning System (DWS)
	Electronic Stability Control (ESC)
	Electronic Park Brake (EPB)
	Electronic Brakeforce Distribution (EBD)
ADVANCED DRIVER ASSISTANCE SYSTEMS (ADAS)^	Front Cross Traffic Alert (FCTA)
	Full Speed Adaptive Cruise Control (FACC)**
	Intelligent Speed Limiter (ISL)
	Intersection Emergency Braking (IEB)
	Intersection Warning System (IWS)
	Lane Departure Warning (LDW)
	Miss Acceleration Mitigation (MAM)**
	Traffic Movement Warning (TMW)
	Traffic Sign Recognition (TSR)**
PASSIVE SAFETY	Driver and Front Left Hand Passenger Seatbelt Pretensioners
	Driver and Front Passenger Airbags
CABIN OCCUPANT SAFETY SYSTEMS (COSS)	ECE-R29 Cab with Side Anti-Intrusion Beams
	Door mounted cornering lamps

**Available with DT only

Accessories

Protection	Isuzu Genuine Bull Bar	●
	Isuzu Seat Covers	●
	Isuzu Floor Mats	●
	Isuzu Dash Mats	●
	Isuzu Mudflaps	●
Technology	Isuzu Cameras	●
Aerodynamics	Air Deflectors	●
Safety	Warning Triangles	●
	Wheel Nut Indicators	●
	Signage	●

● Fitted as Standard ● Option to Fit

Some options are provided via 3rd party retailer. Please discuss with your local Isuzu dealer.

Cabin Features

General Features

Audible Warning	Reverse alarm
Engine Access	Manual cab tilt to 45° with torsion bar assistance
Steps	Heavy duty anti slip steps
Mirrors	Pillar mounted heated mirros with electric folding (manual mirror adjustment)
Wipers	Two speed windscreen wipers with intermittent wipe mode
Exterior Lighting	BI-LED Headlamps with LED Daytime Running Lamps (DRL)
	LED tail lamps
Front Bumper	3-piece resin, body coloured
Security	Remote central locking and immobiliser

Premium Isuzu Audio Visual Unit

Connectivity	Bluetooth
	USB socket
	WiFi with over-the-air updates
	Input for up to 6 High Definition (HD) cameras (available accessory)
Radio	AM / FM
Screen Type	8" High Definition with capacitive touch
Smartphone Integration+	Wireless Apple CarPlay®
	Wireless Android Auto™
	Wi-Fi connectivity
Navigation	Provided via smartphone application

CarPlay is a trademark of Apple Inc.
Android Auto is a trademark of Google LLC.

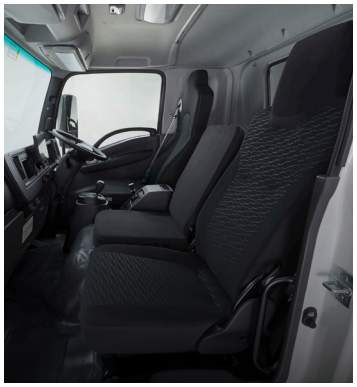

Cabin Interior

Air Conditioning	Manual climate control
Door Windows	Electric control
Entry Assist Grips	Door and roof pillar mounted
Interior Lighting	LED lamp
Power Outlet	24V cigarette lighter
Seatbelts	3-point lap sash seatbelts in all outboard seating positions. Centre seat lap belts.
Seating	Driver's bucket seat
	Passenger benchseat with 2 seat capacity
Steering Column	Tilt / telescopic adjustable
Storage	Overhead cabinet, two cup holders, door pockets

Driver Control

Engine	Full speed adaptive cruise control**
	DPD manual regeneration switch
	Idle speed control
General Controls	Windscreen wipers (2 speed and intermittent modes), washers, exhaust brake, turn signals
Safety Systems	AEB on/off, DWS on/off/sensitivity adjust, LDW on/off/sensitivity adjust, TMW on/off, ESC&ASR on off, headlamps and ALS on/off.
Steering Wheel Controls	Multi Information Display controls Audio Visual volume control Audio Visual seek controls Phone control ADAS controls
Transmission (DT Only)	Gear selection control with P-R-N-D and sequential shift positions

**Available with DT only

Instrumentation

General Instrumentation	Digital odometer with integrated dual tripmeters
	Engine coolant temperature and fuel level gauges
	Speedometer and tachometer
Multi Information Display	Adjustable vehicle speed warning
	AEB, FCW, DWS, LDW, TMW systems activation alerts
	CTW indicator
	Hourmeter
	Vehicle systems status

Chassis

Steering

Type	Power assisted rack and pinion
Turns Lock To Lock	4.20
Lock Angle Inside	42 °
Lock Angle Outside	38 °

Suspension

Front	**Type:** Coil springs
	Other Features: Double acting hydraulic shock absorbers
Rear	**Type:** Taper leaf main spring, taper leaf helper spring
	Other Features: Double acting hydraulic shock absorbers

Fuel Tank

Diesel Tank	**Type:** Frame mounted tank
	Maximum capacity²: 70L
	Fuel cap: Lockable cap
AdBlue® Tank	**Type:** Frame mounted high-density polyethylene tank
	Maximum capacity²: 14 L

Electrical Systems

Type	24 volt
Alternator	90 amp
Battery	2 x 80D26L (600 CCA) batteries connected in series
CAN Bus provision	FMS Provision

Tipper body

Type	All steel body with drop sides with auto release two-way tailgate
Other features	Auto release body lockdown hook
	Shovel rack
	LHS and RHS rope rails
	Non-slip side steps
	20 second rise / 25 second lower time
Capacity	2.0m³
Dimensions (mm) (inside)	3,050 x 1,780 x 370
Material thickness (mm)	Deck plate: 3.2
	Side / front / tail plate: 2.3

Chassis Frame

Type	Cold rivetted ladder frame
Material	JSH440 steel
Dimensions	Side rail (mm): 65 x 180 x 4.0 Rear frame width (mm): 700 (D34)
	Side rail (mm): 65 x 182.6 x 5.3 Rear frame width (mm): 700 (D25)

Axles

Front	**Description:** Isuzu FI026
	Type: Independent wishbone
	Capacity: 2,600 kg
Rear	**Description:** Isuzu R050
	Type: Full floating banjo with four differential pinions
	Capacity: 5,000 kg
	Ratio: 4.777

Wheels & Tyres

Front	**Wheels:** 16 x 5.5 five stud steel wheels
	Tyres: 205/85R16 117/115R
	Steer axle tyre rating: 2,570 kg
Rear	**Wheels:** 16 x 5.5 five stud steel wheels
	Tyres: 205/85R16 117/115R
	Rear axle tyre rating: 4,860 kg
Spare	**Wheel:** 16 x 5.5 five stud steel wheel
	Tyre: 205/85R16 117/115R

Brakes

Type	Ventilated disc/disc with dual circuit hydraulic control, and integrated boost assist
Diameter Front	293 mm
Diameter Rear	293 mm
Park Brake	190mm Diameter drum mounted on rear of transmission

Weights & Dimensions

Weights (kg)

Models	Ratings[3]		Loading Limit[3] (at ground)		Cab Chassis Weight[4]			Model Code
	GVM	GCM	Front	Rear	Front	Rear	Total	
NKR 60.15 MT D25 TIP	5,995	9,500	2,570	4,860	1,643	1,276	2,919	NK2605
NKR 60.15 DT D25 TIP	5,995	8,000	2,570	4,860	1,673	1,268	2,959	NK2606

Dimensions (mm)

Models	WB	OAL	FOH	ROH	CA	RT	ORT	CH	Turning Circle Kerb to Kerb (m)[5]
NKR 60.15 MT D25 TIP	2,490	4,815	1,015	1,310	2,027	1,425	1,865	1,999	8.09
NKR 60.15 DT D25 TIP	2,490	4,815	1,015	1,310	2,027	1,425	1,865	1,997	8.09

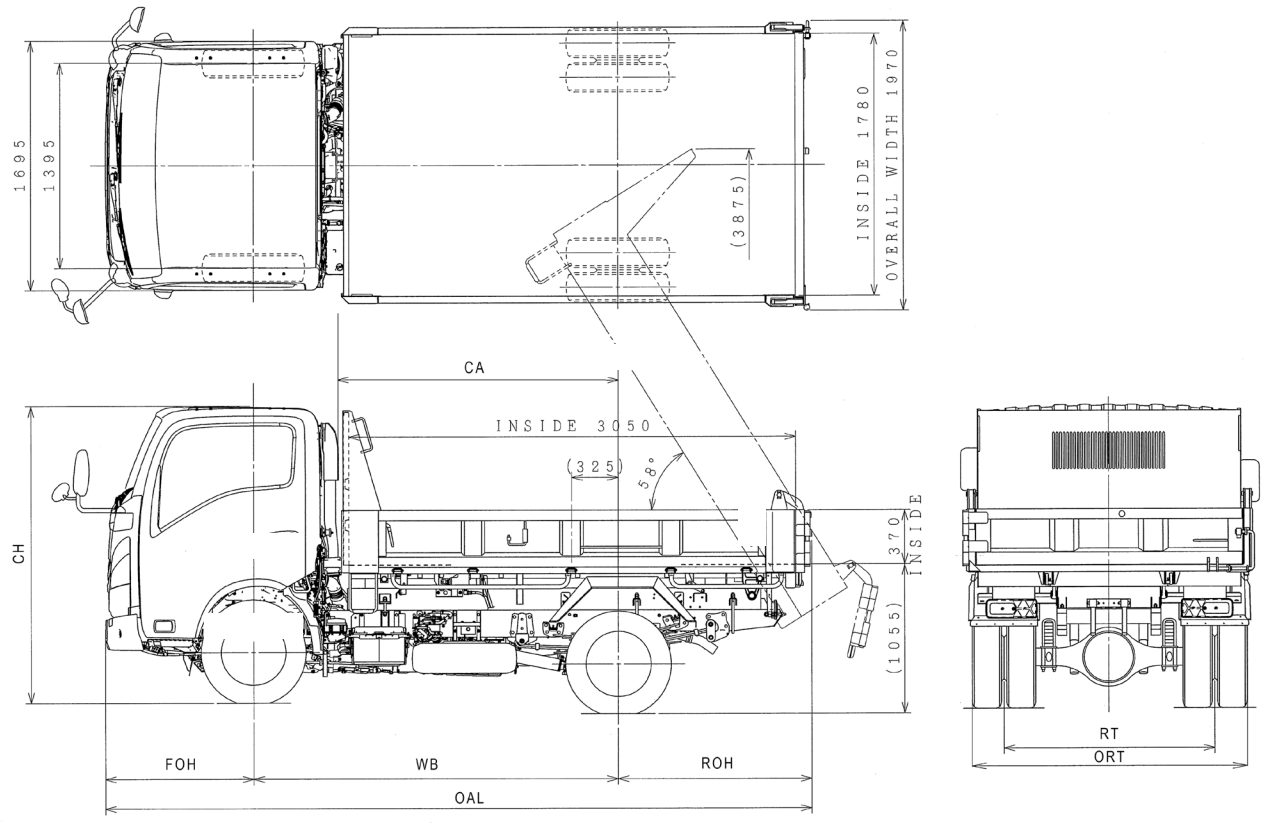

Drawing for reference only. Refer to the Isuzu Body Builder Guide for details.

Service & Support

Dealer Network

Service & Support	National Isuzu Truck Dealer Network and Accredited Service Centres
	Find a Dealer Online

Find your local dealer

Scan QR Code

Warranty#

Chassis	5 Year Warranty#
	250,000 km#
Genuine Parts & Accessories	2 Year Warranty or 50,000km# (When installed by an Isuzu Trucks Approved Dealership - Including Labor)

Total 5 Year Warranty, including Base Warranty (36 months / 100,000kms) and Additional Warranty (24 months / 150,000kms), cover is 60 months or 250,000kms, whichever comes first. To qualify for Additional Warranty, all scheduled servicing during the Base and Additional Warranty periods (ie. the total 60 months) must be performed by an authorised Isuzu service dealer from the date of delivery to the first customer. If scheduled servicing is performed by unauthorized service providers, only the Base Warranty will apply. Tipper bodies are excluded from Additional Warranty. These are covered by Base Warranty only. Factory built tipper bodies (ShinMaywa) are excluded from Additional Warranty. Tipper bodies are limited to the Base Warrany only.

[2] As shown on fuel tank. Volume of fuel that can be added to a near-empty tank will vary according to operating conditions.

[3] Vehicle ratings and axle weight limits are subject to government regulatory requirements and weight distribution analysis. Consult your Isuzu dealer to select the correct vehicle for your specific application.

[4] Cab chassis only as supplied and including 100% fuel, 100% AdBlue, tools, and spare wheel (if applicable).

[5] Turning circle dimensions are based on manufacturers calculations and may vary under real-world conditions.

The information in this spec sheet was correct at time of printing, but all measurements, specifications and equipment are subject to change without notice. Some equipment may have been changed and/or is available at extra cost. Isuzu New Zealand (INZ) may make changes at any time without notice, in prices, colours, materials, equipment and models. INZ makes all reasonable attempts to ensure the availability of all vehicles and equipment. The information in this spec sheet is general in nature. Your Isuzu dealer can confirm all measurements, specifications and vehicle / equipment availability upon request. To the extent permitted by the law, INZ is not liable to any person as result of reliance on the content of this spec sheet.

^Advance Driver Assistance Systems are intended to support the driver but are not a replacement for safe driving practices.

*Smartphone Integration compatible with selected apps and the latest smartphone versions of iOS and Android.Active data service is required for some fuctionality. For USB connections, a connection cable is sold separately.

ISUZU
DRIVEN BY RELIABILITY